
SunSmart Commercial Series Air Source Heat Pump



Model		SSD-1800-410A	SSC-1900-134A	SSC-3800-134A	SSC-220T-134A
Heating capacity	W	17500	15200	33000	220000
COP	W/W	4,10	4,23	4,29	4.1
Rated water temp	°C	55	55	55	55
Max water temp	°C	60	75	75	75
Noise level	dB	60	65	65	54
Running ambient temp.	°C	(-7~43)			
Max. current	A	12.3	16.0	34.0	129.0
Max. power	W	4268	3590	7710	53660
Heating capacity	L/h	375	325	680	3800
Refrigerant		R410A	R134A	R134A	R134A
Dimension	mm	752(A)×691(C)×950(B)	752(A)×691(C)×950(B)	1410(A)x748(C)x950(B)	2248(A)x2230(C)x2176(b)
Water Connections	mm	25	25	32	100
Water pressure drop	KPA	50	50	60	440
Water Flow Volume	M³/H	3	3	6	38
Internal Circ. Pump	Yes/No	No	No	No	No
Net weight	kg	160	160	260	1900
Power supply	V/Hz/Ph	380-415V~/50/3	380-415V~/50/3	380-415V~/50/3	380-415V~/50/3
Casing		galvanized sheet powder coated			

Heating capacity @ air 20°C/15°C; water temperature from 15°C-55°C

Dimensions

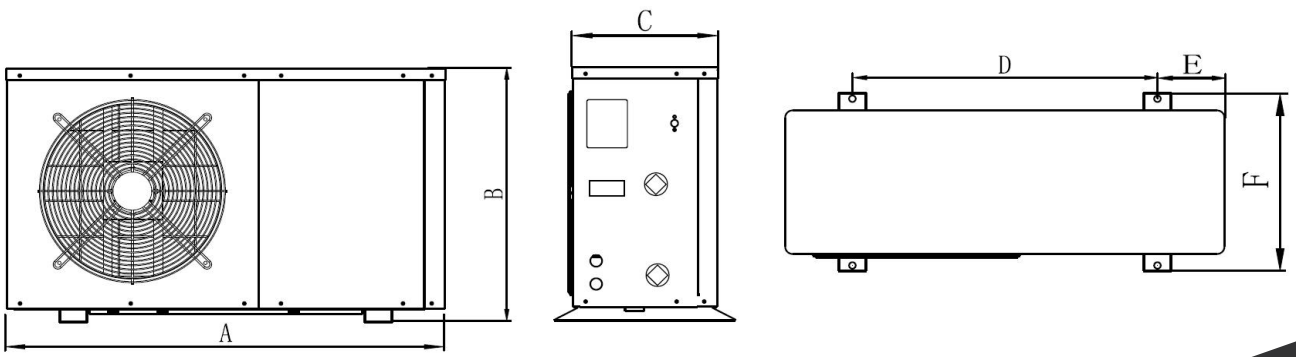

In the interest of performance and durability improvements, SunScan reserves the right to change any specifications at any time without notice.

SUNSCAN™
SOLAR ENERGY TECHNOLOGIES
Enquiries - 021 551 5906
www.sunscan.co.za