SunSmart Domestic Series Air Source Heat Pump








Model		SSD-0360-410A	SSD-0540-410A	SSD-0760-410A	SSD-1320-410A
Heating capacity	W	3600	5400	7600	12000
COP	W/W	4,18	4,15	4,20	4.16
Rated water temp	°C	55	55	55	55
Max water temp	°C	60	60	60	60
Noise level	dB	48	48	52	53
Running ambient temp.	°C	(-7~43)			
Max. current	A	6,8	9	12	23
Max. power	W	1350	2000	2750	4680
Heating water capacity	L/h	80	120	165	285
Refrigerant		R410A			
Dimension	mm	936(A)×311(C)×550(B)	936(A)×311(C)×550(B)	1011(A)x420(C)x614(B)	986(A)x420(C)x798(B)
Mounting Dimension	mm	650(D)×143(E)×385(F)	650(D)×143(E)×385(F)	680(D)×183(E)×420(F)	Vertical floor standing
water pressure drop	KPa	35	35	40	45
Circulation pump	mm	Yes	Yes	Yes	Yes
Water Connection	mm	20	20	20	25
Net weight	kg	50	54	68	85
Power supply	V/Hz/Ph	220~/50/1	220~/50/1	220~/50/1	220~/50/1
Casing		galvanized sheet powder coated			

Heating capacity @ air 20°C/15°C; water temperature from 15°C-55°C

Dimensions

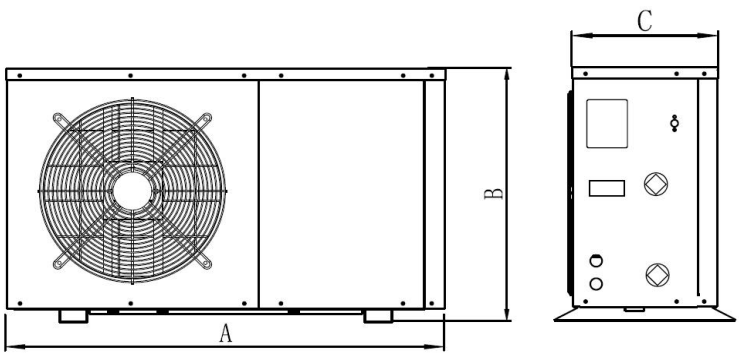

In the interest of performance and durability improvements, SunScan reserves the right to change any specifications at any time without notice.

SUNSCAN™
SOLAR ENERGY TECHNOLOGIES

Enquiries - 021 551 5906
www.sunscan.co.za